


# Passive Plus+

## NON-MAGNETIC CERAMIC DIELECTRIC TRIMMER CAPACITOR -56NM

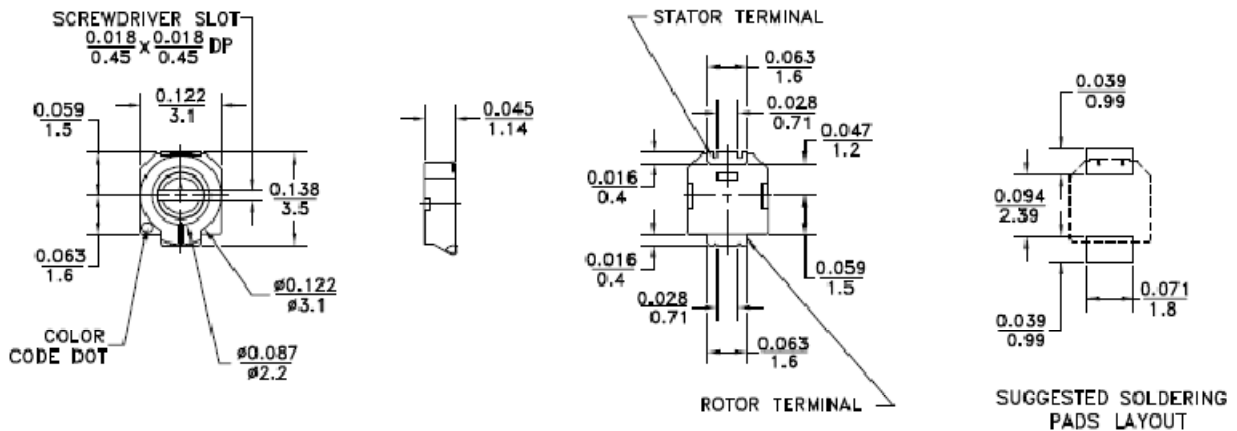

MODEL NUMBER	PF		DC WORKING VOLTAGE	DC WITHSTANDING VOLTAGE	Q MIN (1MHz)	SRF @ max rated capacitance	Temperature Coefficient	Color Code
	Min	Max						
PPIGKY3R056NM	1.5	3.0	500	1100	500	2.1	0±200	Black
PPIGKY6R056NM	2.0	6.0	500	1100	500	1.5	0±300	Blue
PPIGKY8R056NM	3.0	8.0	500	1100	500	1.3	-750±500	Violet
PPIGKY10056NM	2.0	10.0	500	1100	500	1.2	0±300	None
PPIGKY15056NM	3.0	15.0	500	1100	500	.92	0±300	Pink
PPIGKY20056NM	4.5	20.0	500	1100	300	.81	0±500	Red
PPIGKY30056NM	5.5	30.0	500	1100	200	.7	-750±500	Orange
PPIGKY40056NM	8.0	40.0	500	1100	200	.6	-750±500	Yellow

### Specifications:

1. Operating Temperature Range: -25 to +85° C
2. Insulation Resistance 104 Megohms.
3. Torque: 0.14 to 1.0 oz-in
4. Dimensions ( in/mm )
5. Construction: Non-Magnetic