



UHF/RF High Q Power Transmitter  
Capacitors (NP0 TC)  
Multi-Layer Ceramic Capacitors

**7676C (0.760" x 0.760")**

### Product Features


- High Q
- High RF Current/Voltage
- Ultra Stable Performance
- Capacitance Range:  
1.0pF to 20000pF
- Working Voltage: 5000V
- Extended Voltage: 8000V

### Typical Circuit Applications

- Semiconductor Manufacturing
- High Energy Power Transfers
- Plasma Chambers
- Medical Equipment



### Part Numbering

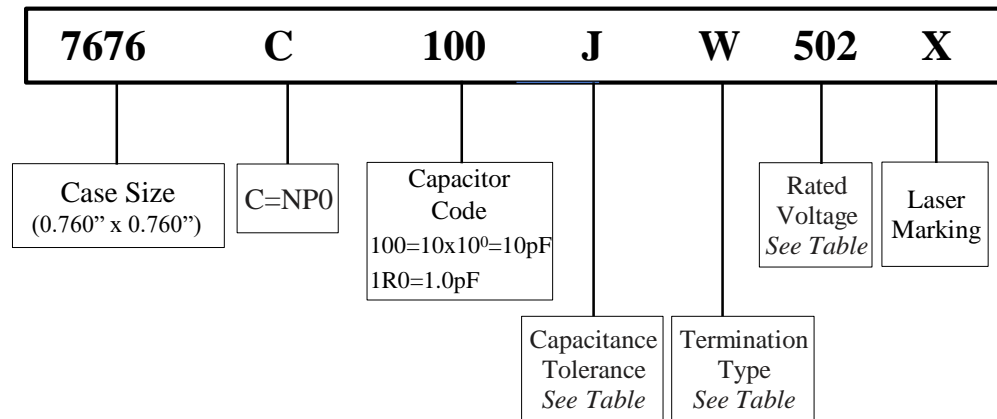

### Capacitance Tolerance Codes

Code	B	C	D	F	G	J	K
Tol.	±0.1pF	±0.25pF	±0.5pF	±1%	±2%	±5%	±10%

### Voltage Codes

Voltage	Code
1000V	102
2000V	202
3000V	302
5000V	502
8000V	802



UHF/RF High Q Power Transmitter  
Capacitors (NP0 TC)  
Multi-Layer Ceramic Capacitors

**7676C (0.760" x 0.760")**

≠ 7676C Capacitance Values

For special capacitances, tolerances and WVDC, please contact PPI.




Cap. pF			Rated WVDC		Cap. pF			Rated WVDC		Cap. pF			Rated WVDC	
Code	Tol.	Std.	Ext.	pF	Code	Tol.	Std.	Ext.	Code	Tol.	Std.	Ext.		
1.0	1R0			33	330						1000	102		
1.2	1R2			39	390						1200	122		
1.5	1R5			47	470						1500	152		
1.8	1R8			56	560						1800	182	3000V	5000V
2.2	2R2			68	680		5000V				2200	222	Code	Code
2.7	2R7			82	820		Code	8000V			2700	272	302	502
3.3	3R3	B,C,D		100	101		502	Code 802			3300	332		
3.9	3R9			120	121						4700	472		
4.7	4R7		5000V	150	151						5100	512		
5.6	5R6		Code	180	181	F,G,J,K					5600	562	G,J,K	
6.8	6R8		502	220	221						6800	682	1000V	3000V
8.2	8R2			270	271						7500	752	Code	Code
10	100			300	301						8200	822	102	302
12	120			390	391		3000V	5000V			10000	103		
15	150			470	471		Code	Code			12000	123		
18	180	F,G,J,K		560	561		302	502			15000	153	1000V	2000V
22	220			680	681						18000	183	Code	Code
27	270			820	821						20000	203	102	202




UHF/RF High Q Power Transmitter  
Capacitors (NP0 TC)  
Multi-Layer Ceramic Capacitors

**7676C (0.760" x 0.760")**


## ≠ Termination Types and Codes




Chip Termination:  
Codes: **W, L, P**

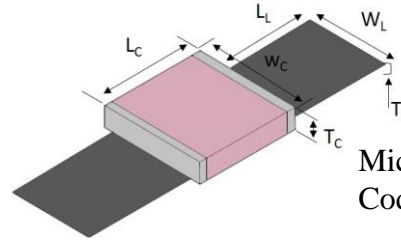


Microstrip Termination:  
Codes: **MS, MN**

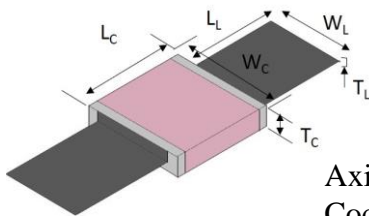

Axial Ribbon Termination:  
Code: **AR, AN**

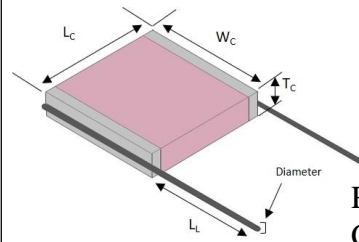

Radial Wire Termination:  
Codes: **RW, RN**



Axial Wire Termination:  
Codes: **AW, BN**

Termination Code	Magnetic Termination
<b>W</b>	100% Sn Solder over Nickel Plating
<b>L</b>	90% Sn10%Pb Tin/Lead Solder over Nickel Plating
<b>MS</b>	Silver-Plated Copper
<b>AR</b>	
<b>RW</b>	
<b>AW</b>	

Termination Code	Non-Magnetic Terminations
<b>P</b>	100% Sn Solder of Copper Plating
<b>MN</b>	Silver-Plated Copper
<b>AN</b>	
<b>RN</b>	
<b>BN</b>	

Note: "Non-Magnetic" means no magnetic materials.



≠ Termination Types For Termination Types images, see previous page

Unit: inch (millimeter)

Magnetic Terminations								
		Capacitor Dimensions				Lead Dimensions		
Code	Term.	Length Lc	Width Wc	Thickness Tc	Overlap B	Length LL	Width WL	Thickness TL
W	Chip					-	-	-
MS	Microstrip	0.760	0.760±0.010	0.154±0.008	0.063	0.787	0.591 ± 0.010	0.008±0.001
AR	Axial Ribbon	-0.010+0.015 (19.3 -0.25+0.38)	(19.3±0.25)	(3.90±0.20) max	(1.60) max	(20.0) min	(15.0±0.25)	(0.20± 0.025)
RW	Radial Wire					0.787 (20.00) min	Dia.: 0.030±0.004 (0.80 ± 0.10)	
AW	Axial Wire					1.181 (30.00) min		

⊗ Non-Magnetic Terminations ⊗								
		Capacitor Dimensions				Lead Dimensions		
Code	Term.	Length Lc	Width Wc	Thickness Tc	Overlap B	Length LL	Width WL	Thickness TL
P	Chip					-	-	-
MN	Microstrip	0.760	0.760±0.010	0.154±0.008	0.063	0.787	0.591 ± 0.010	0.008 ± 0.001
AN	Axial Ribbon	-0.010+0.015 (19.3 -0.25+0.38)	(19.3±0.25)	(3.90±0.20) max	(1.60) max	(20.0) min	(15.0±0.25)	(0.20 ± 0.025)
RN	Radial Wire					0.787 (20.00) min	Dia.: 0.031 ± 0.004 (0.80 ± 0.10)	
BN	Axial Wire					1.181 (30.00) min		

Note: Non-Magnetic means no magnetic materials. All leads are attached with high temperature solder and parts are RoHS Compliant.



## ⚡ Electrical Specifications


Quality Factor (Q)	No less than 1000pF, Q value more than 2000, Test Frequency 1MHz; More than 1000pF, Q value more than 2000, Test Frequency 1MHz
Insulation Resistance (IR)	Test Voltage: 500V 10 <sup>5</sup> Megaohms min. @ +25°C rated WVDC 10 <sup>4</sup> Megaohms min. @ +125°C rated WVDC
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (WVDC)	250% of Voltage of 5 seconds, Rated Voltage ≤ 500VDC 150% of Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250 VDC 120% of Voltage for 5 seconds, Rated Voltage > 1250 VDC
Operating Temperature Range	-55°C to 175°C
Temperature Coefficient (TC)	-55°C to 125°C 0±30ppm/°C >125°C to 175°C 0±60ppm/°C
Capacitance Drift	±0.02% or ±0.02pF, whichever is greater
Piezoelectric Effects	None
Termination Type	See Termination Type Table

## ⚡ Environmental Specifications


	Specification	Test Parameters
Thermal Shock	<b>DWV:</b> The initial value <b>IR:</b> Shall not be less than 30% of the initial value. <b>Capacitance Change:</b>	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature (-55°C and 125°C) stay 30 minutes, the time of removing shall not be more than 3 minutes. Perform five cycles.
Moisture Resistance	No more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 106
Humidity (Steady State)	<b>DWV:</b> The initial value <b>IR:</b> The initial value <b>Capacitance Change:</b> No more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A With 1.5Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours minimum.
Life	<b>IR:</b> Shall not be less than 30% of the initial value. <b>Capacitance Change:</b> No more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108. For 2000 hours, at 125°C. 200% of Voltage for Capacitors, Rated Voltage ≤ 500VDC; 120% of Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC; 100% for Voltage for Capacitors, Rated Voltage > 1250VDC
Terminal Strength	<b>Force:</b> 30lbs. min. <b>Duration Time:</b> 5 to 10 seconds	MIL-STD-202, Method 211A, Test Condition A. Applied a force and maintained for a period of 5 to 10 seconds. The force shall be in the direction of the axes of the terminations.

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.


≠ ESR vs. Capacitance Measured @ 30MHz

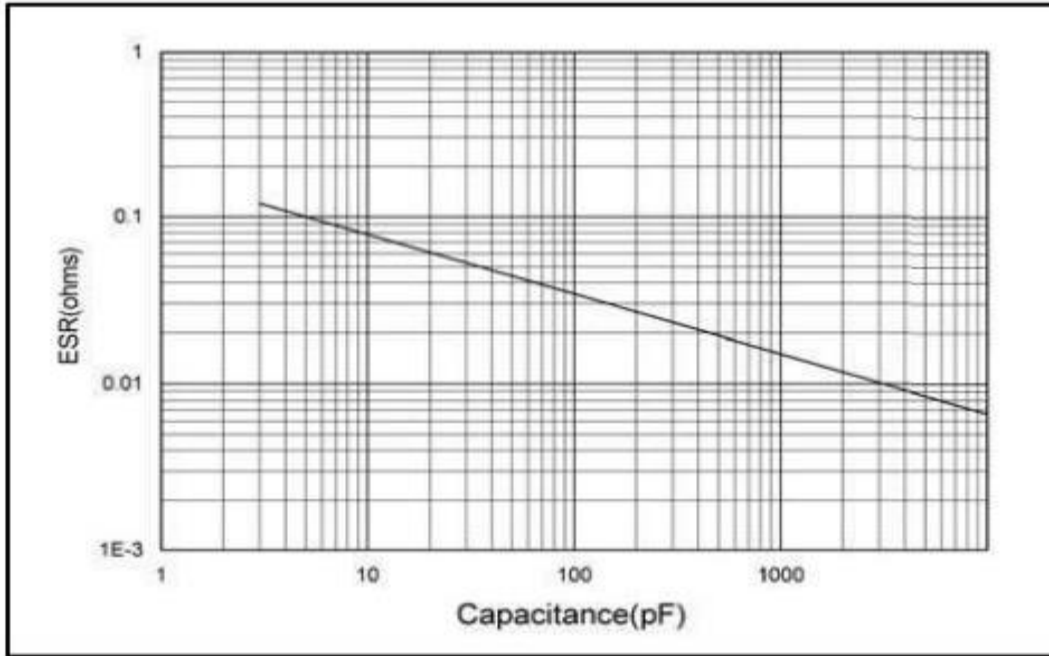


≠ Self Resonant Frequency vs. Capacitance

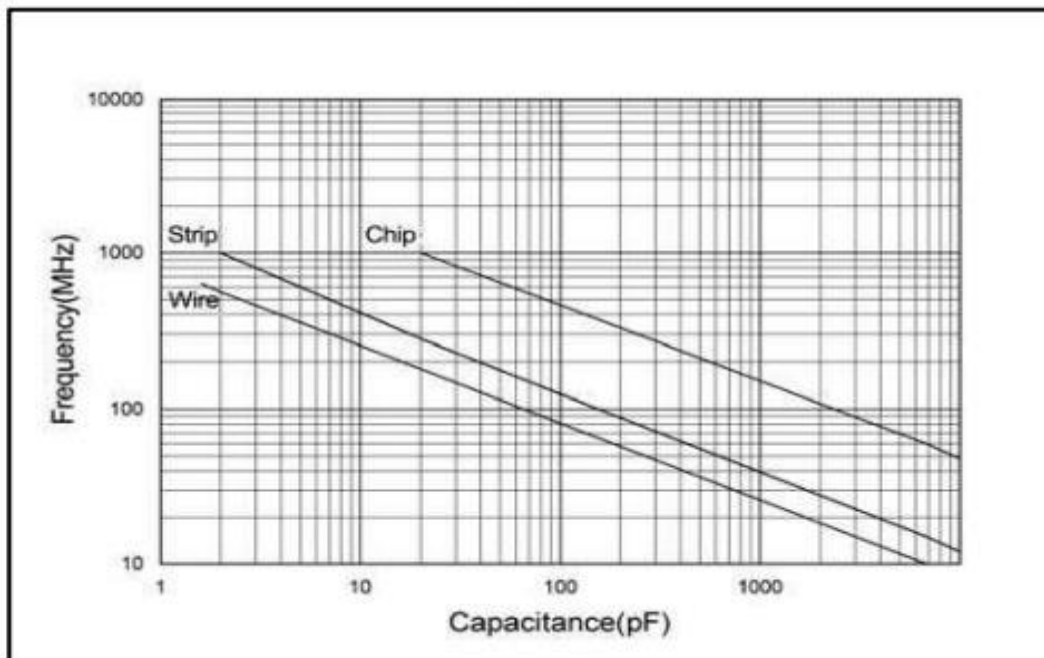


≠ Strip Terminals Rated Current vs. Frequency

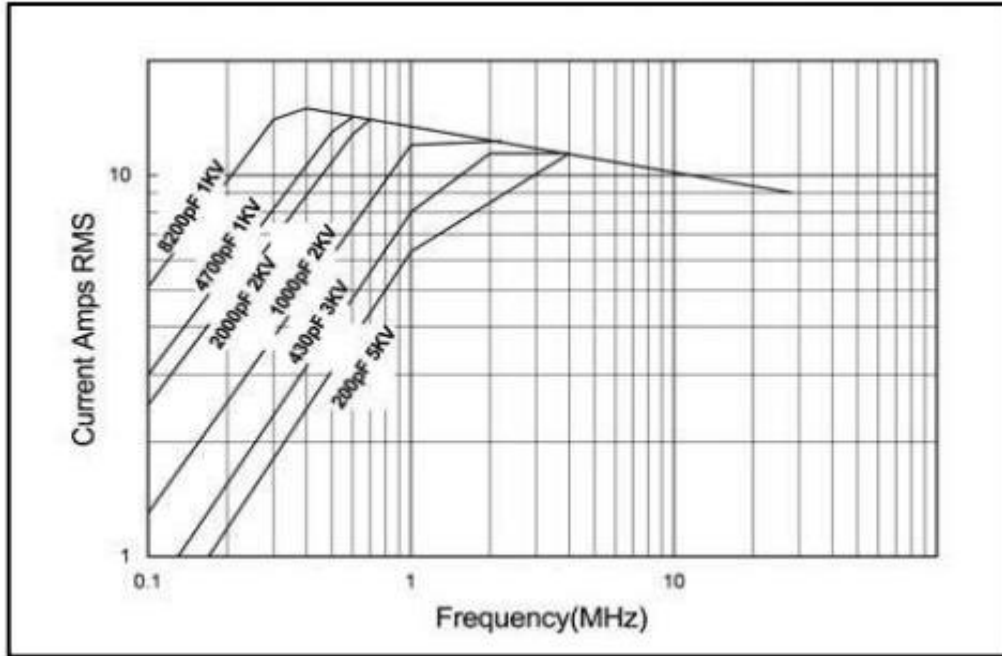

≠ Wire Terminals Rated Current vs. Frequency

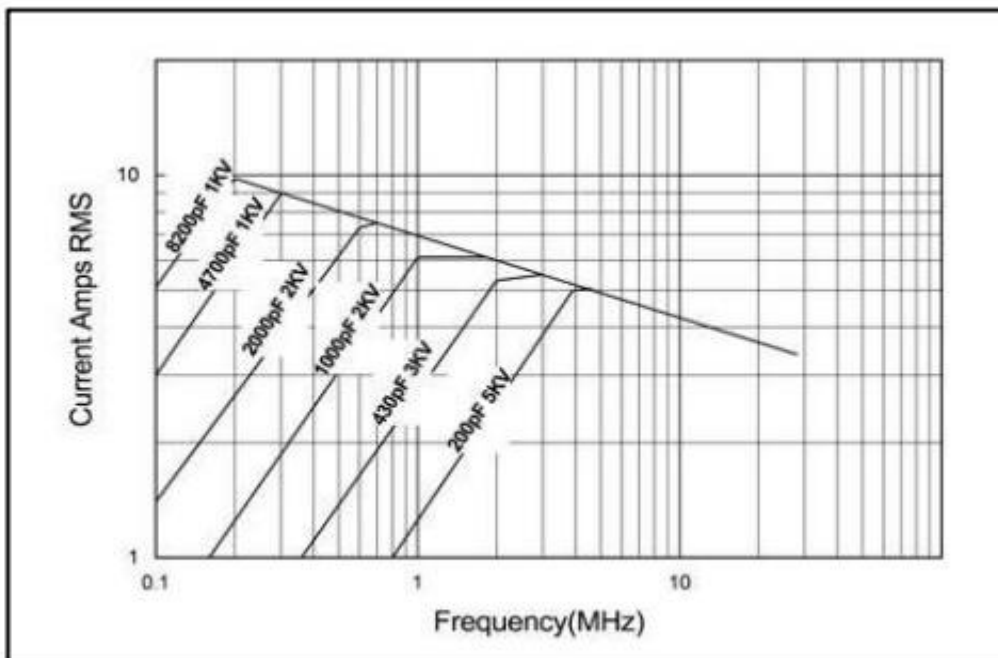


### ⚡ % Maximum Current vs. Ambient Temperature

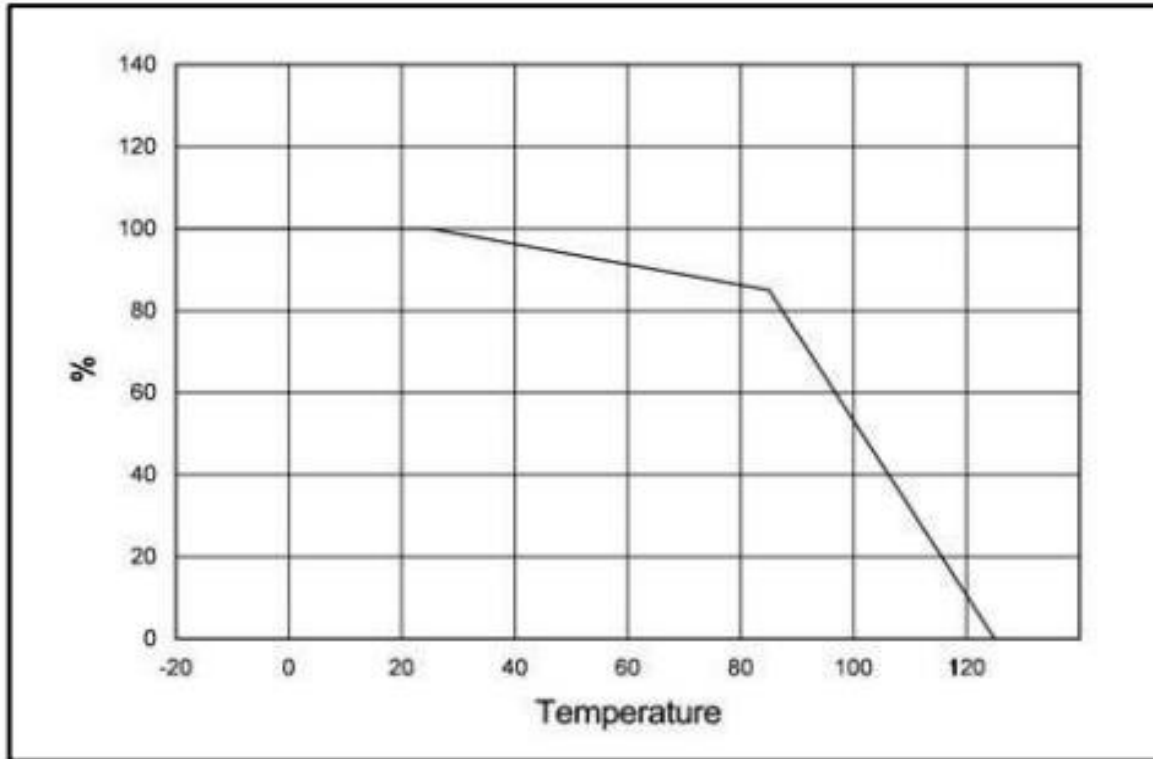

### ⚡ Custom Assemblies

Passive Plus offers Capacitor Assemblies for high power requirements. Typical assemblies are configured in series and/or parallel combinations, producing higher voltage/current handling capabilities, extended capacitance range and tighter tolerances.

To get started, simply send us either a mechanical drawing or circuit conditions and we can recommend a solution. All components are 100% up-screened for Partial Discharge and Sonoscanned. All assemblies include a 100hr Military burn in.

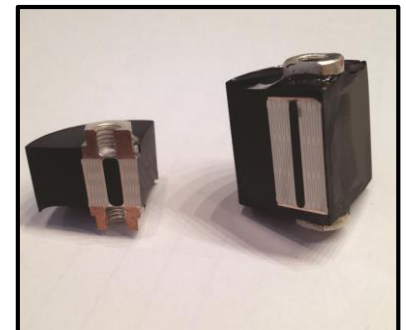



## ⚡ Recommended Land Pattern Dimensions

When mounting the capacitor to substrate, it's important to carefully consider that the amount of solder (size of fillet) used has a direct effect upon the capacitor once it's mounted.

- 1) The greater the amount of solder, the greater the stress to the elements. This may cause the substrate to break or crack.
- 2) In the situation where two or more devices are mounted onto a common land, be sure to separate the device into exclusive pads by using soldering resist.

### ⚡ Horizontal Mounting

A	B	C
16.00	3.30	19.60

Dimensions: mm

