


PART SPECIFICATIONS

TUNING TORQUE	0.4 - 2.8 in. oz.
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
STOP TORQUE	max 3.5 in.oz.
VIBRATION	60g / 10-2000 Hz
MOUNTING TORQUE	max. --- in.oz
SHOCK	1500g / 0.5ms
ADJUSTMENT ACCURACY	≤ 1 x 10⁻³ of adjusted value
OPERATING TEMPERATURE	-65°C....+125°C
CONTACT RESISTANCE	< 0.001Ω
DIELECTRIC	Air

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)
PPI-60-0410-10003-000	0.3	3.5	250	> 5000	>10 ⁶	50 ± 30	--	--	0.7

*See Optional Hardware below for sealcap options

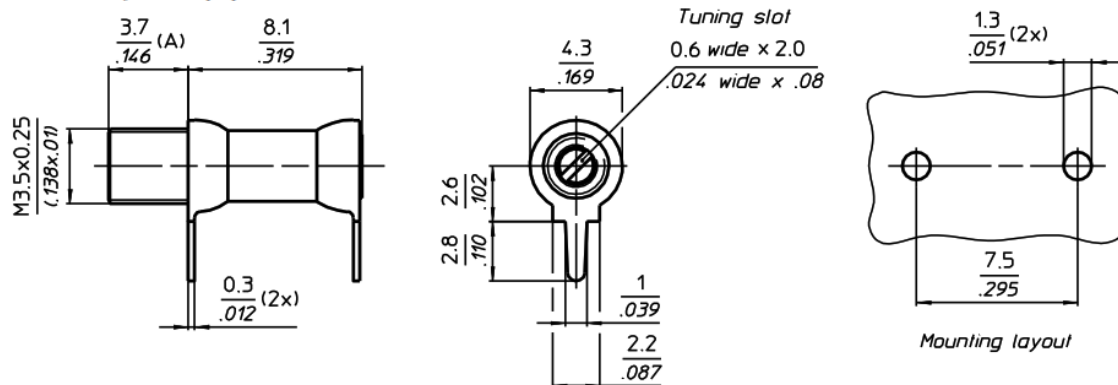

Optional Hardware

Figure A
Order #: PPI-60-0410....-030
Sealcap Unmounted





Figure B
Order #: PPI-60-0410....-019
Slotted Sealcap Unmounted

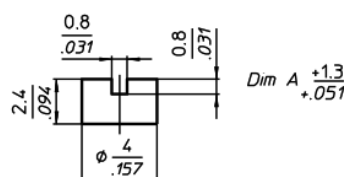

Dimensions are in $\frac{\text{mm}}{\text{inches}}$