






Air Tubular Trimmer

PPI-60-0611-1000xx-000



PART SPECIFICATIONS

Tuning Torque	0.4 – 4.2 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 8.3 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	Max 42 in. oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air Tubular

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-60-0611-10007-000	0.6	7.0	250	>5000	>10 ⁶	0 ± 50	4.7	---	1.4
PPI-60-0611-10010-000	0.7	10.0	250	>5000	>10 ⁶	0 ± 50	5.6	---	1.4

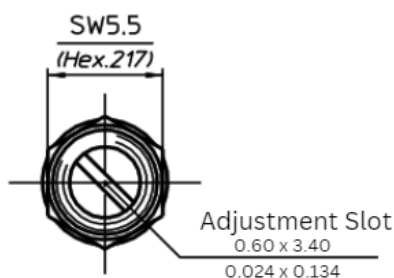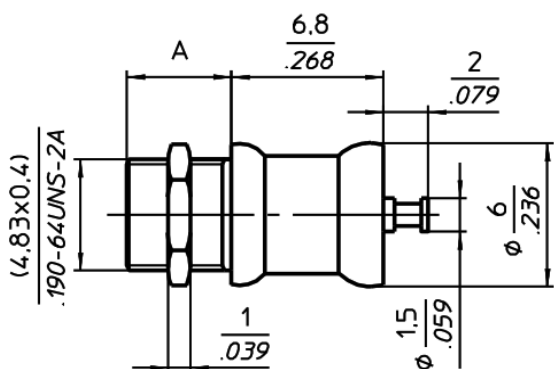

Optional Hardware



Dimensions are in $\frac{\text{mm}}{\text{inches}}$