



Air Tubular Trimmer




PPI-60-0715-100xx-000

PART SPECIFICATIONS


Tuning Torque	0.99 – 5.1 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 11.33 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	----	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air Tubular

The use of high-temperature solder allows solder bath temperatures for installation in printed circuits up to +300°C.
Solder duration max 10 seconds.

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Weight (g)
PPI-60-0715-10011-000	1.1	11.0	250	>5000	>10 ⁶	65 ± 30	2.2
PPI-60-0715-10016-000	1.1	16.0	250	>5000	>10 ⁶	65 ± 30	2.2

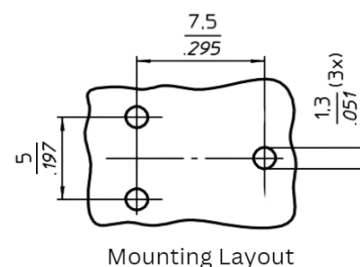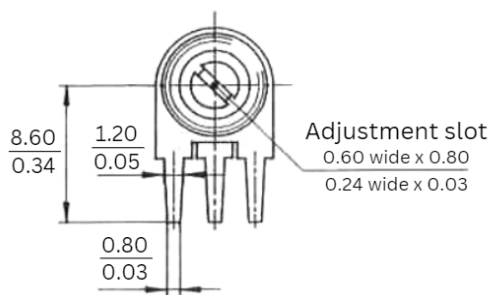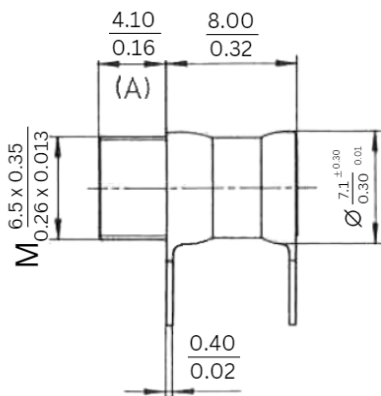

Optional Hardware

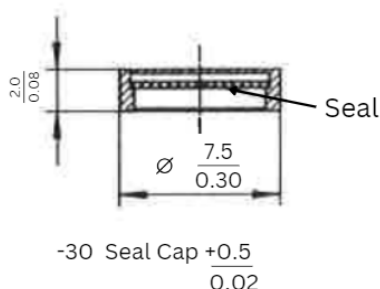

Dimensions are in mm
inches