






PART SPECIFICATIONS

Tuning Torque	0.9 – 5.0 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 11.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	max. 70 in oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air (air gap 0.15mm)

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	DimA (mm)	Weight (g)
PPI-60-0720-15010-000	0.8	10.0	500	>5000	>10 ⁶	0 ± 15	4.4	7.5	1.9
PPI-60-0720-15014-000	1.0	14.0	300	>5000	>10 ⁶	0 ± 16	4.4	7.5	2.1

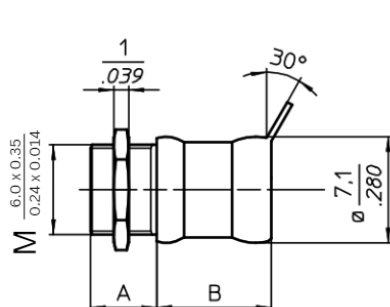

Optional Hardware



Dimensions are in $\frac{\text{mm}}{\text{inches}}$