


|                            |                                         |                              |                      |
|----------------------------|-----------------------------------------|------------------------------|----------------------|
| <b>Tuning Torque</b>       | 0.9 – 5.0 in. oz.                       | <b>Rotational Life</b>       | ≥ 75 cycles, IEC 418 |
| <b>Stop Torque</b>         | max 11.1 in. oz.                        | <b>Vibration</b>             | 60g / 10 – 2000Hz    |
| <b>Mounting Torque</b>     | ----                                    | <b>Shock</b>                 | 1500g / 0.5 ms       |
| <b>Adjustment Accuracy</b> | ≤1 x 10 <sup>-3</sup> of adjusted value | <b>Operating Temperature</b> | -65°C...+125°C       |
| <b>Contact Resistance</b>  | < 0.001Ω                                | <b>Dielectric</b>            | Air                  |

| Part Number           | Cmin<br>(pF) | Cmax<br>(pF) | Test<br>Voltage<br>(VDC) | Q Factor<br>@200 MHz | Rinsul.<br>(MΩ)  | TC<br>(ppm/°C) | Weight<br>(g) |
|-----------------------|--------------|--------------|--------------------------|----------------------|------------------|----------------|---------------|
| PPI-60-0724-15010-000 | 0.8          | 10.0         | 500                      | >5000                | >10 <sup>6</sup> | 0 ± 15         | 2.0           |
| PPI-60-0724-15014-000 | 1.0          | 14.0         | 300                      | >5000                | >10 <sup>6</sup> | 0 ± 15         | 2.1           |

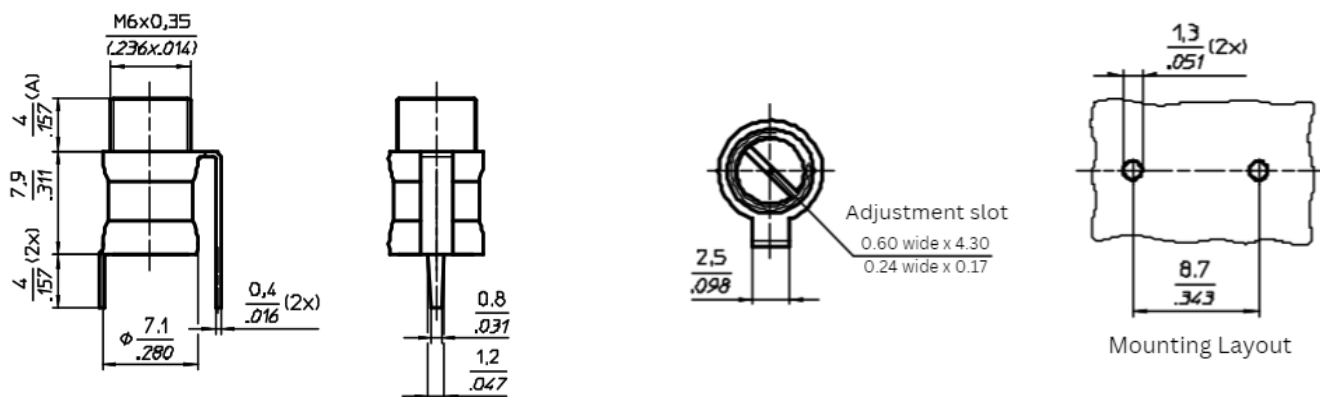


  
 -030 Sealcap unmounted  
 Dim A:  $\begin{matrix} +0.5 \\ +0.2 \end{matrix}$


  
 -019 Slotted Sealcap unmounted  
 Dim A:  $\begin{matrix} +1.40 \\ +0.55 \end{matrix}$

www.passiveplus.com

+1 (631) 425-0938

sales@passiveplus.com  
PPI-60-0724-150xx-000DATA073124RevA