





Air Tubular Trimmer

PPI-60-0747-150x0-000



PART SPECIFICATIONS

Tuning Torque	0.9 – 5.0 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 11.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	----	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air (Air gap 0.15mm)

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-60-0747-15020-000	1.0	20.0	300	>1000	>10 ⁶	30 ± 20	3.6	14.8	3.3
PPI-60-0747-15030-000	1.0	30.0	300	>500	>10 ⁶	30 ± 20	6.4	17.1	3.7

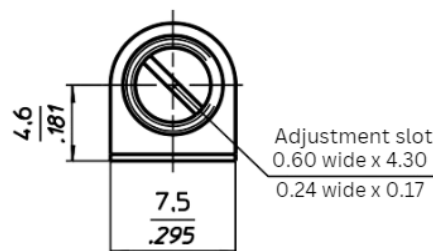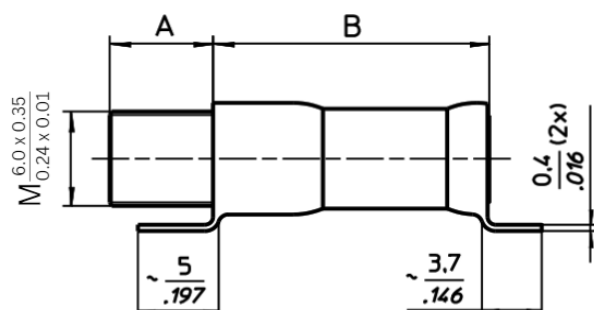

Optional Hardware

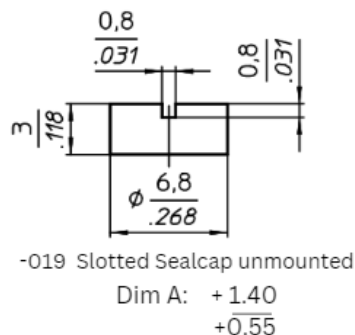

Dimensions are in $\frac{\text{mm}}{\text{inches}}$