

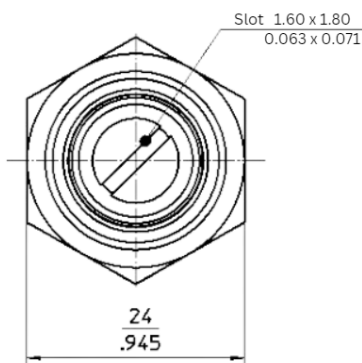



PART SPECIFICATIONS

Tuning Torque	2.8 – 16.5 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 21 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	Max 140 in. oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air (Air gap, 1.40mm)

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-60-2001-84010-000	2.3	11.0	3500	>5000	>10 ⁶	100 ± 300	---	---	68

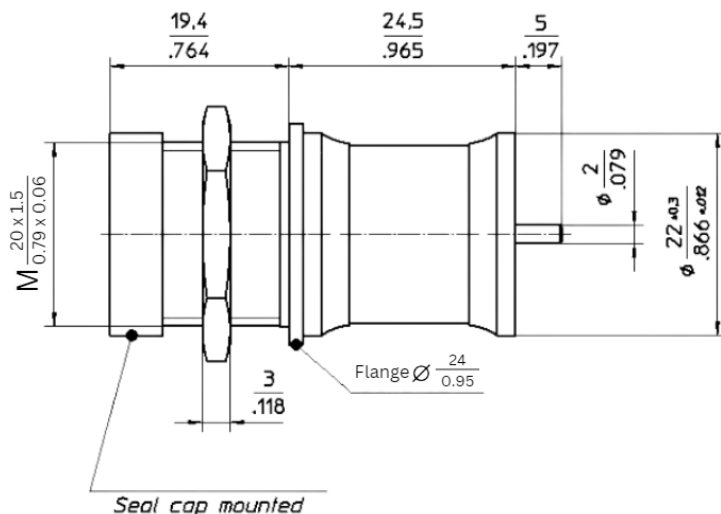

Mounting Layout

Dimensions are in mm
inches

(Seal cap not shown)