



PART SPECIFICATIONS

Tuning Torque	0.14 – 1.4 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 2.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	----	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Sapphire


Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-66-0317-00002-000	0.45	2.5	1000	>4000	>10 ⁶	0 ± 50	5.8	3.20	0.4
PPI-66-0317-00004-000	0.65	4.5	1000	>3000	>10 ⁶	0 ± 50	8.0	4.20	0.5
PPI-66-0317-00008-000	0.85	8.0	1000	>2000	>10 ⁶	0 ± 75	12.3	6.50	0.6

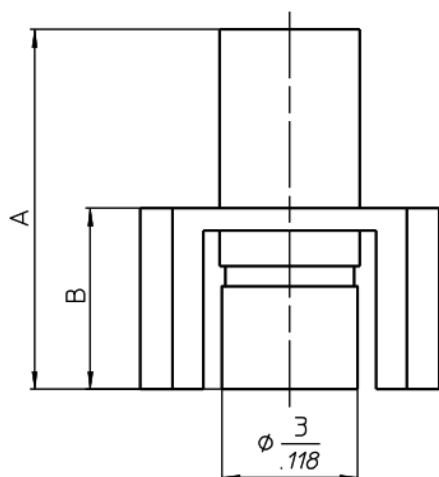


Tuning slot
0.50 wide x 2.30
0.02 wide x 0.09

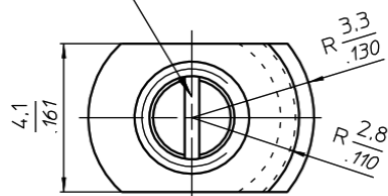

Optional Hardware

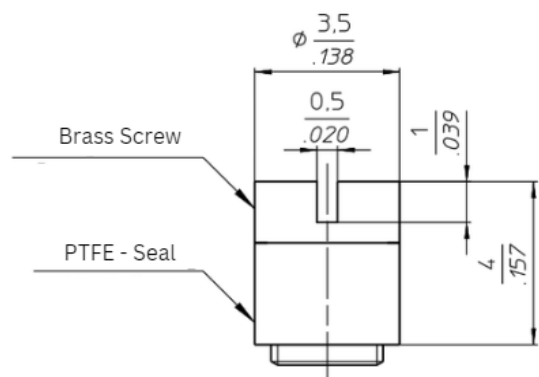

Seal cap suitable for repeated usage



Penetrable PTFE-seal cap

Dimensions are in $\frac{\text{mm}}{\text{inches}}$