




PART SPECIFICATIONS

TUNING TORQUE	0.14 - 1.4 in. oz
STOP TORQUE	max. 2.1 in. oz
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
VIBRATION	60 g / 10-2000Hz
SHOCK	1500g / 0.5ms
OPERATING TEMPERATURE	-65°C...+125°C
ADJUSTMENT ACCURACY	≤ 1 x 10 ⁻³ of adjusted value
CONTACT RESISTANCE	< 0.001 Ω
DIELECTRIC	Sapphire


STANDARD CONFIGURATIONS

Part - No.	C _{min}	C _{max}	Test Voltage (VDC)	Q-Factor (@ 200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)
PPI-66-0401-00004-000	0.6	4.5	1000	>3000	>10 ⁶	350 ± 75	6.0	8.0	0.39

Trimmer non-magnetic, permeability < 1,001 (Trimmer on tape & reel on inquiry)

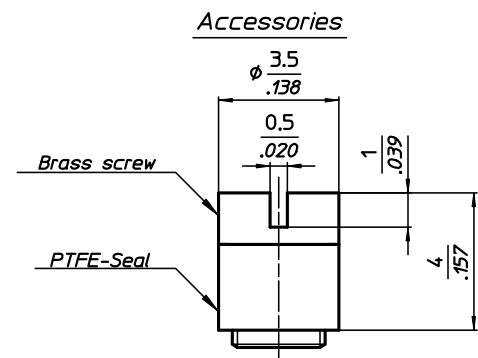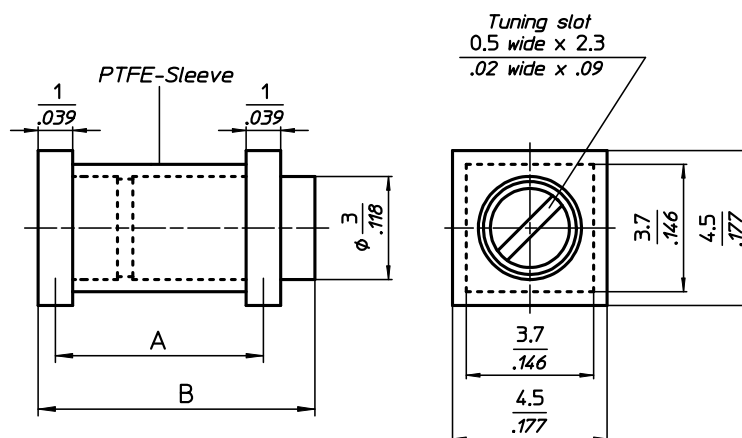

Seal cap suitable for repeated usage

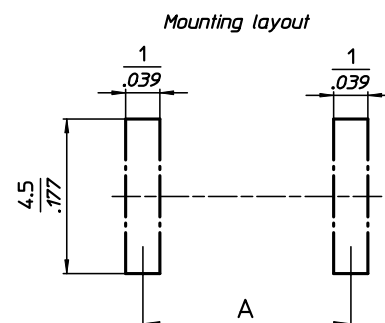

Dimensions are in mm
inches