
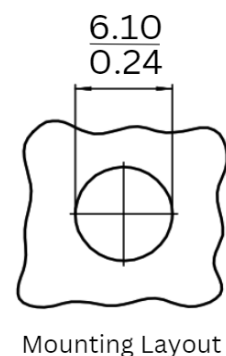




PART SPECIFICATIONS

Tuning Torque	0.9 – 5.0 in. oz.	Rotational Life	≥ 75 cycles, IEC 418
Stop Torque	max 11.1 in. oz.	Vibration	60g / 10 – 2000Hz
Mounting Torque	Max. 70 in oz.	Shock	1500g / 0.5 ms
Adjustment Accuracy	≤1 x 10 ⁻³ of adjusted value	Operating Temperature	-65°C...+125°C
Contact Resistance	< 0.001Ω	Dielectric	Air (Air gap 0.15mm)


Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q Factor @200 MHz	R _{insul.} (MΩ)	TC (ppm/°C)	Dim A (mm)	Dim B (mm)	Weight (g)
PPI-60-0744-15010-000	0.8	10.0	500	>5000	>10 ⁶	0 ± 15	4.4	7.6	1.9
PPI-60-0744-15014-000	1.0	14.0	300	>5000	>10 ⁶	0 ± 15	4.4	7.6	2.1
PPI-60-0744-15016-000	1.2	16.0	300	>5000	>10 ⁶	0 ± 15	4.4	7.5	1.9
PPI-60-0744-15020-000	1.0	20.0	300	>1000	>10 ⁶	30 ± 20	5.9	12.5	2.9
PPI-60-0744-15030-000	1.0	30.0	300	>500	>10 ⁶	30 ± 20	6.8	16.7	3.3

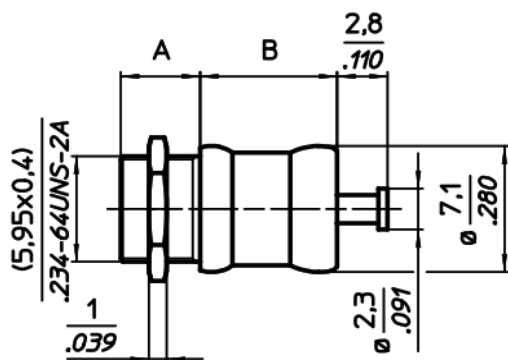

Optional Hardware



-030 Sealcap unmounted
Dim A: +0.5
+0.2



-019 Slotted Sealcap unmounted
Dim A: +1.40
+0.55

Dimensions are in mm
inches