




Air Tubuular Trimmer


PPI-60-0716-1001x-000

PART SPECIFICATIONS

TUNING TORQUE	0.9 - 5.0 in.oz.
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
STOP TORQUE	max 11.1 in.oz.
VIBRATION	60g / 10-2000 Hz
MOUNTING TORQUE	max. -- in.oz.
SHOCK	1500g / 0.5 ms
ADJUSTMENT ACCURACY	≤ 1 x 10 ⁻³ of adjusted value
OPERATING TEMPERATURE	-65°C....+125°C
CONTACT RESISTANCE	< 0.001Ω
DIELECTRIC	Air

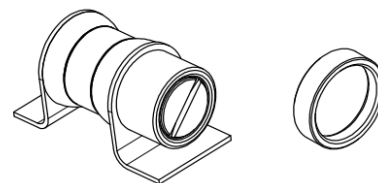

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Dim. A (mm)	Dim. B (mm)	Weight (g)
PPI-60-0716-10011-000	1.1	11.0	250	> 5000	>10 ⁶	65 ± 30	4.1	--	2.4
PPI-60-0716-10016-000	1.1	16.0	250	> 5000	>10 ⁶	65 ± 30	4.1	--	2.4

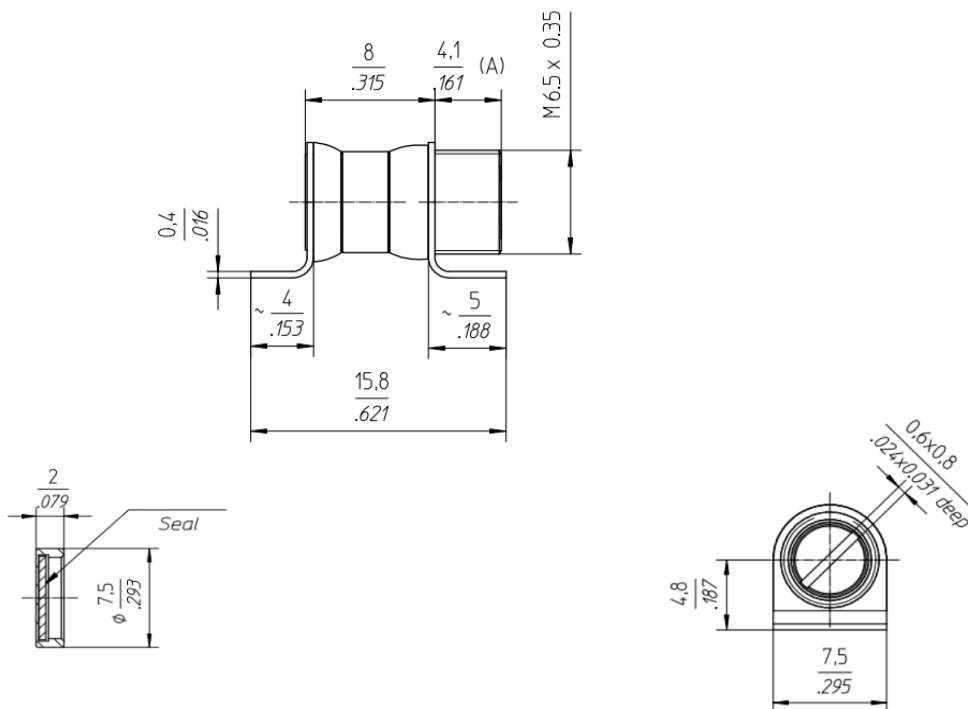

-030 Seal cap unmounted Dimension A +0,5mm

Dimensions are in mm
inches

Please note that the contents of this document are subject to change at any time at PPI's sole discretion. The most up-to-date version of this document is available at www.passiveplus.com.

www.passiveplus.com

+1 (631) 425-0938

sales@passiveplus.com

PPI-60-0716-1001x-000DATA110625RevA

PPI
Passive Plus
RF & Microwave Components