


PART SPECIFICATIONS


TUNING TORQUE	0.9 - 5.0 in.oz
STOP TORQUE	max 11.1 in.oz
ROTATIONAL LIFE	≥ 75 cycles, IEC 418
VIBRATION	60 g / 10-2000Hz
SHOCK	1500g / 0.5ms
OPERATING TEMPERATURE	-65°C....+125°C
ADJUSTMENT ACCURACY	≤ 1 x 10⁻³ of adjusted value
CONTACT RESISTANCE	< 0.001Ω
DIELECTRIC	Air (Air gap 0.15mm)

Part Number	Cmin (pF)	Cmax (pF)	Test Voltage (VDC)	Q-Factor (@200MHz)	IR (MΩ)	TC (ppm/°C)	Weight (g)
PPI-60-0746-15030-000	1.0	30.0	300	>500	>10 ⁶	30 ± 20	3.60


*See Optional Hardware below for sealcap options

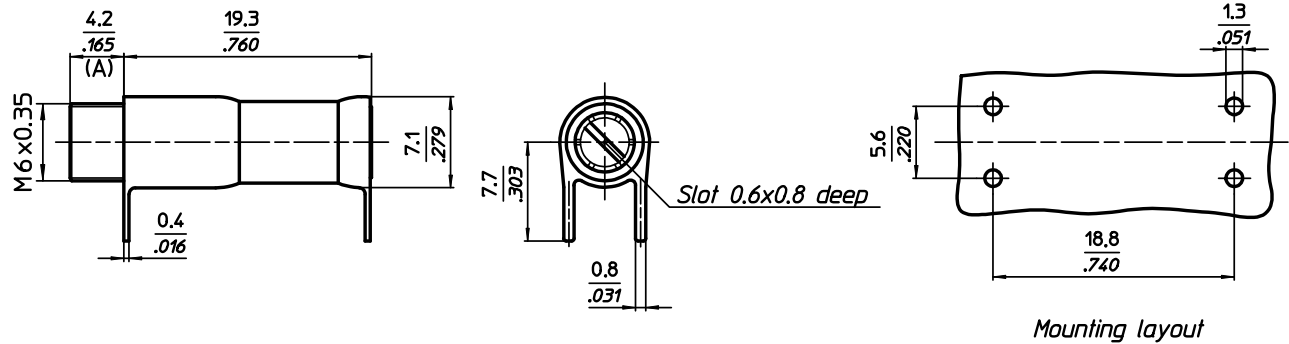

Accessories



-030 Sealcap unmounted. Dim A $\begin{smallmatrix} +0.5 \\ +.02 \end{smallmatrix}$



-019 Slotted sealcap unmounted: Dim A $\begin{smallmatrix} +1.4 \\ +.055 \end{smallmatrix}$

Dimensions are in $\frac{\text{mm}}{\text{inches}}$

SPECIAL CONFIGURATION (on inquiry):
e.g. Non-Magnetic, Extended shaft, high-temperature solder a.o.